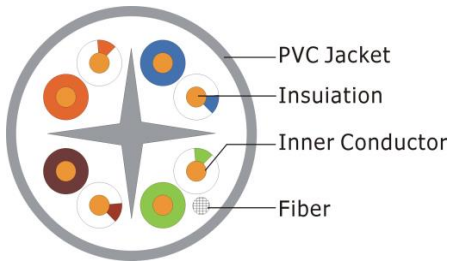



## INDOOR

### ASIT-UTP6009-UTP Cat6 Indoor COPPER (305m./ม้วน) ASIT

Item	Material	Methods	Diameter (mm)	Mould	Dosage (kg/km)
Inner Conductor	COPPER	1/0.57COPPER±0.01mm	0.57mm		
Insulation	HD-PE	Thickness : 0.20mm	0.95mm		
Twisted	Blue P=15±1mm	Orange P=19±1mm	1.90mm		
	Brown P=17±1mm	Green P=22±1mm			
Twisted	PE Isolation	Diameter R=4.5±2mm	4.5mm		
Taping	Polyester foil				
Shield	Aluminium / PET foil				
Jacket	PVC 45P Blue	Thickness : 0.60mm	6.0mm		
Spray word	Way	Spray word	Color	Black	
	Sontent	ASIT INDOOR UTP CAT6 CABLE 0.57mm CU 001m-305m			
Chart			Attention		
			Technical Data		
			Conductor Resistance		
			Insulation Resistance		
			Temperature Range		
			Min. Bending Radius		
			Fire behaviour		
			Standards		
	Date	4/12/2016	Unit	mm	