

SN-NVR10/08E3/064ASH


64CH 8HDD NVR



Key features

- Up to 64channel IPC input
- H.265/H.264+/H.264/MPEG4 codec decoding
- Max 384Mbps incoming bandwidth
- Up to 12Mp resolution preview&playback
- 2HDMI/VGA simultaneous video output
- 4/8/16 channel synchronous realtime playback, GRID interface
- ONVIF Version 2.4 conformance / Software SDK
- Support 8 SATA HDDs up to 48TB (RAID 0/1/5/6/10)
- Smart Tracking and intelligent Video / Support N+M hot Standby
- Support Remote Live-view, Playback&Backup via Central Monitoring Software
- Support Remote Live-view&Playback via Smartphone

Dimensions (mm)

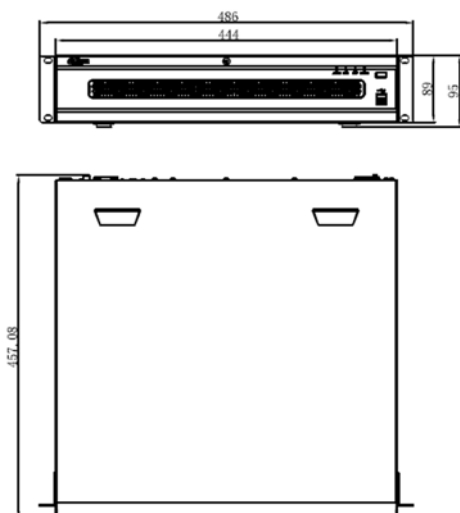

Specifications

VIDEO/AUDIO	
Video Input	64ch h.265/h.264 12MP/8MP/6MP/5MP/4MP/3MP/1080P/720P
Incoming Bandwidth	384Mbps
Two-way Talk	1channel Input, 1channel Output, RCA
DISPLAY	
Interface	2 HDMI (1 HDMI up to 3840x2160),1 VGA
Resolution	3840x2160,1920x1080,1280x720,1024x768
Display Split	1/4/8/9/16/25/36
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
RECORDING	
Compression	H.265/H.264+/H.264/MPEG4
Resolution	12Mp/8Mp/6Mp/5Mp/4Mp/3Mp@25/30fps; 1080P/ 720P/ D1@50/60fps
Recording Bit Rate	384Mbps
PLAYBACK& BACKUP	
Sync Playback	1/4/8/16
Backup Mode	USB Device/Network/ eSATA Device
HARD DISK	
SATA HDD	8 SATA interface for 8HDD
HDD Mode	Raid 0/1/5/6/10
Capacity	Up to 6TB for each disk
External HDD	1 Esata port
NETWORK	
Network Interface	2 RJ45 10M/100M/1000M
Protocol	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, SNMP
INTERFACE	
HDMI/VGA	2ch HDMI, 1ch VGA
USB	4 ports (2 *USB3.0, 2*USB2.0), Support Mouse control
Audio I/O	1channel Input, 1channel Output, RCA
Alarm I/O	16ch Alarm input, 8ch Alarm output
GENERAL	
Power Supply	Single, AC 110~240V, 50/60 Hz
Operating Temperature	-10°C~+55°C / 10%-90%RH / 86~106kpa
Chassis	2U
Product Dimensions	454.9mm×486mm×91mm
Product Weight	8KG

<http://www.sunellsecurity.com/>

