



SN-NVR2532E2

32CH 2HDD NVR



Key Features


- Up to 32ch IP cameras access
- Easy to use same interface of GUI/WEB/Client
- 2 SATA hard disk up to 8TB
- 2 RJ45 10M/100M/1000M network interface
- Simultaneous HDMI&VGA up to 4K output
- 8ch alarm In/2ch alarm Out
- 1ch audio I/O
- Remote Live-view&playback via network

Specification

System	
Main Processor	Dual-core embedded processor
Operating System	Embedded LINUX
Video and Audio	
IP Camera Input	32 Channel
Audio I/O	1/1, RCA
Two-way Talk	Yes
Display	
Interface	1 HDMI, 1 VGA
Resolution	HDMI: 3840x2160, 1920x1080, 1440x900, 1280x1024 VGA: 1920x1080, 1280x1024, 1280x720
Decoding Capacity	1ch 8MP/4ch 1080P@30fps
Multi-screen Display	1/4/9/16/32
Recording	
Compression	H.265+/ H.265/H.264+/H.264
Resolution	8MP/6MP/5MP/4MP/3MP/1080P/720P/ D1&etc.
Record Rate	260Mbps
Bit Rate	100Kbps ~ 6Mbps Per Channel
Record Mode	Manual, Schedule (Regular, Continuous), Motion Detection, Video Loss, Camera Tamper, Alarm in
Record Interval	Post-record: 30 ~ 60 sec
Video Detection and Alarm	
Trigger Events	Recording, Buzzer, Push message, Pop up message.
Video Detection	Motion Detection, Video Loss, Camera Tamper
Alarm In/Out	8/2
Playback and Backup	
Sync Playback	32/16/9/4/1
Search Mode	Time /Date, Alarm, Picture grid, Event
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device

Network	
Network Function	HTTP, HTTPS, TCP/IP, IPv4, IPv6, UPnP, UDP, RTSP, SMTP, NTP, DNS, DHCP, P2P, IP Filter, DDNS, IEEE802.1X, SNMP
Max. User	Access 9 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF, SDK, CGI
Storage	
Internal HDD	2 SATA Ports, up to 8TB for each HDD
eSATA	N/A
Interface	
Interface	2 RJ-45 port (10/100/1000Mbps)
PoE Interface	N/A
PoE Max Power	N/A
USB	2 ports (USB 2.0 x2)
General	
Power Supply	DC12V/3A
Power Consumption	< 15W (without HDD)
Operating Conditions	-10 °C ~ 50 °C (14 °F ~ 122 °F)
Storage Conditions	Less than 90% RH
Certifications	CE/FCC/ISO9001/ISO14001
Dimensions	372x310.5x46.5mm
Net Weight	3kg (No disk)

Dimensions(mm)

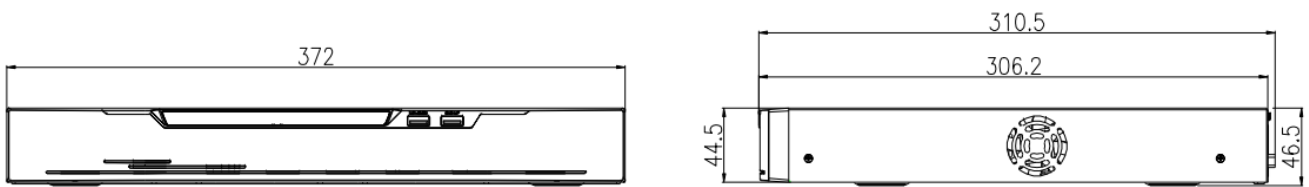

Rear Panel

